

12-27-01

JC965 U.S. PTO  
12/20/01

J1073 U.S. PTO  
10/02/21  
12/20/01

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Attorney's Docket No. INT-0001A

In re Application of:	)	
Michael David Church	)	
Serial No. Unknown	)	Art Unit: Unknown
Filed: Concurrently herewith	)	Examiner: Unknown

For: A Method for Fabricating Enhanced EPROM Structures  
with Accentuated Hot Electron Generation Regions

NEW APPLICATION TRANSMITTAL LETTER

BOX PATENT APPLICATION  
Commissioner for Patents  
Washington, D.C. 20231

Enclosed for filing is an Application for Letters Patent (consisting of 15 pages of specification, 6 pages of claims, 1 page of abstract and 14 sheets of drawings); a Declaration/Power of Attorney form (consisting of 4 pages); an Information Disclosure Statement with attached prior art (1 page with 4 references attached); a check for payment; and a postcard for "receive" date stamping.

CERTIFICATE OF MAILING

I hereby certify that this New Application Transmittal Letter and all documents referred to as being enclosed or attached is being deposited with the United States Postal Service, "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated below and is addressed to: **BOX PATENT APPLICATION, USPTO, PO Box 2327, Arlington, VA 22202**

EE 877 339 993 US  
"Express Mail" mailing No.

December 20, 2001  
Date of Deposit

Reene Jones  
Typed Name of Depositing Person

Ree Jones  
Signature of Depositing Person

The application is for:


**A Method for Fabricating Enhanced EPROM Structures  
with Accentuated Hot Electron Generation Regions**

Enclosed is a check in the amount of \$798.00 which covers: \$758.00 as payment for the Application Filing Fee (21 total claims with 2 independent claims) and \$40.00 as payment for the Recordation of the Assignment.

The Commissioner is hereby authorized to charge any fee deficiency or credit any fee overpayment relating to the filing of the above-referenced Patent Application and all documents relating thereto to: Deposit Account No. 18-1680.

Respectfully submitted,

Date: December 20, 2001

  
\_\_\_\_\_  
Richard K. Robinson (PTO Reg. No. 28,109)  
Harry C. Post, III (PTO Reg. No. 26,019)  
Attorneys for Applicant

**Robinson & Post, L.L.P.**  
North Dallas Bank Tower, Suite 575  
12900 Preston Road, LB-41  
Dallas, Texas 75230  
Tel: 972-866-7786  
Fax: 972-866-7787

**UNITED STATES PATENT APPLICATION**

**for:**

**“A Method of Fabricating Enhanced EPROM Structures  
with Accentuated Hot Electron Generation Regions”**

**Inventor:**

**Michael David Church**

**Prepared by:**

**Richard K. Robinson (PTO Reg. No.28,109)**  
**Robinson & Post, L.L.P.**  
**North Dallas Bank Tower**  
**12900 Preston Road, LB-41**  
**Dallas, Texas 75230**  
**Telephone: (972) 866-7786**  
**Facsimile: (972) 866-7787**

1006294-12001  
Docket # 16292001

## **BACKGROUND OF THE INVENTION**

This invention relates to improved EPROM structures and the method of manufacturing the structures with CMOS and BICMOS technologies that utilize lightly doped drain extensions.

The prior art CMOS and BICMOS device structures often consist of an N type lightly doped drain (N<sub>l</sub>dd) which is used to grade the drain to body doping. This grading is necessary for reliability purposes. Without the grading, the drain to body electric field is large enough to generate an abundance of hot electrons. Hot electrons eventually lead to threshold voltage shifts, drive current degradation, sub-threshold voltage degradation and transconductance degradation. Any or all of these parametric shifts may be sufficient to lead to circuit failures over the life of the circuit. Hence reliability is compromised.

Attempts have been made to solve this problem. United States Patent 4,970,565 dated November 13, 1990, describes a method of building a sealed charged storage structure in a memory cell for an EPROM device which is totally sealed from ultraviolet light by a conductive cover without openings therein for leads to the cell's drain, source and gate. Electrical communication with the source is provided by direct contact with the conductive cover. Access to the drain and floating gate is provided by buried N<sup>+</sup> implants, buried N<sup>+</sup> layers or N wells crossing underneath the sides of the cover. The memory cell has a single poly floating gate rather than a stacked floating gate/control gate combination. The buried N<sup>+</sup> implant or N well serves as the control gate and is capacitively coupled to the floating gate via a thin oxide layer in a coupling area.

United States Patent 5,307,312 dated April 26, 1994 describes a process for obtaining an N channel single polysilicon level EPROM cell. The process provides for the simultaneous N<sup>+</sup> type implantation of areas of a semiconductor substrate of type P for the formation of a control gate and of highly doped regions of source and drain, defining a channel region. After oxide growth there is executed the deposition and the definition of a

polysilicon layer, one region of which constitutes a floating gate above the control gate and the channel region and partially superimposed over the regions of source and drain.

United States Patent 5,470,771 dated November 28, 1995, describes a method of manufacturing a floating gate memory device. A gate oxide film is formed on a surface of a semiconductor substrate. A tunnel insulating film having a thickness smaller than that of the gate insulating film is formed in a portion thereof corresponding to a tunnel region. A first silicon film having a low impurity concentration is formed on the gate insulating film. A second silicon film having an impurity concentration higher than that of the first silicon film is formed on the first silicon film so as to be connected thereto. A third silicon film is formed on the second silicon film through an insulating film. The second and third silicon films are formed into floating and control gates, respectively, thereby forming a semiconductor memory device.

Finally, United States Patent 5,479,367 dated December 26, 1995 describes an N channel single polysilicon level EPROM cell. The process provides for the simultaneous N<sup>+</sup> type implantation of areas of a semiconductor substrate of type P for the formation of a control gate and of highly doped regions of source and drain, defining a channel region. After oxide growth there is executed the deposition and the definition of a polysilicon layer, one region of which constitutes a floating gate above the control gate and the channel region and partially superimposed over the regions of source and drain.

## SUMMARY OF INVENTION

An EPROM structure includes a NMOS transistor integrated with a capacitor. The terminal names of the NMOS transistor follow the conventional nomenclature: drain, source, body and gate. The gate of the NMOS transistor is connected directly and exclusively to one of the capacitor plates. In this configuration, the gate is now referred to as the “floating gate”. The remaining side of the capacitor is referred to as the “control gate”.

In an unprogrammed state as fabricated, the NMOS transistor has a relatively low threshold voltage (the voltage necessary to turn “on” the transistor), typically less than 1.0 volts when referenced from the floating gate to ground. In the EPROM structure, there is no direct connection to the floating gate, so the threshold voltage must be referenced to the control gate. Because of capacitive voltage dividing, the threshold voltage is somewhat higher, but still typically less than 2.0 volts when referenced to the control gate. Ignoring parasitic capacitances, the relationship of control gate voltage to floating gate voltage is:

$$V_{fg} = V_{cg} * C1 / (C1 + C2)$$

where:      fg = floating gate  
              cg = control gate  
              C1 = capacitance of the capacitor  
              C2 = gate capacitance of the NMOS transistor

So, with the source and body grounded, the drain biased at some positive voltage (5.0 volts, for example), and the control gate biased greater than the threshold voltage (2.5 volts, for example), the NMOS transistor in an unprogrammed EPROM is in the “on” state and drain current flows.

To program the EPROM, the bias conditions are set momentarily so that there is a substantial amount of drain current flowing and hot electrons are generated. Typical bias conditions might be 7.0 volts on the drain and 12.0 volts on the control gate. With these bias conditions, a tremendous amount of hot electrons are generated in a typical 5V, 0.5 micron NMOS transistor. With 12.0 volts on the control gate, there might be 10.0 volts or more across the NMOS gate oxide according to the equation given above. This gate oxide potential "assists" the injection of hot electrons (which already have an abundance of energy) through the gate oxide onto the polysilicon gate. Since the polysilicon gate is a floating gate without connections, these electrons are trapped here due to the oxide insulators which encapsulate the polysilicon once the programming event is complete. After ~200 milliseconds (a typical duration of the programming event), the amount of electrons trapped on the floating gate is significant and sufficient to drastically impact the NMOS transistor characteristics. During such programming, it is possible to increase the NMOS transistor threshold voltage to 4.0-10.0 volts. Assuming this new, higher threshold voltage and the same operating bias conditions described above (5.0 volts on the drain and 2.5 volts on the control gate), the NMOS transistor of the EPROM is now in the "off" state (negligible drain current flowing). By selectively programming EPROMs on a circuit depending on the circuit behavior, the circuit can be trimmed or fine-tuned to enhance its performance. It should be noted at this time that 200 milliseconds to program a single EPROM can be very costly. On a complex circuit, it is possible that several programming iterations must be performed for each circuit which can significantly added to the probe/test cost. A faster programming EPROM could reduce probe/test cost significantly.

5V CMOS technologies in the 0.5 micron regime generally utilize NMOS architectures which attempt to control hot electron generation. Most popular is the lightly doped drain (NLdd) combined with spacer technology. These precautions are necessary due to reliability concerns. Over the course of a circuit's active 10 year lifetime, hot electron are continuously being generated at a low level. These hot electrons will degrade the transistor performance (threshold voltage shifts, drive current degradation, sub-

threshold slope degradation and transconductance degradation) which can eventually lead to circuit failure. Because of the reliability implications, the NMOS transistor architecture is optimized so that significant hot electron generation is eliminated.

Here is the dilemma: special precautions have been taken to control hot electron generation in the standard NMOS transistor, but excessive hot electron generation is desired in the EPROM's NMOS transistor for fast, reliable programming. An improved EPROM semiconductor structure invention is formed by the addition of a P type region that augments a P well doping under a NMOS transistor gate. This added P region under the gate is formed by an additional photolithography and an additional implantation process steps. Alternatively, this P region could be formed during other processing steps that are already in the process flow for other reasons (an NPN transistor P Base, for example). The addition of this new P region changes the dopant grading of the drain-body junction which allows for an increase in the generation of hot electrons in the EPROM NMOS transistor. Hence, the EPROM can be programmed faster and/or at a lower voltage. Only the NMOS transistor of the EPROM receives the added P region. The standard NMOS transistor in the remainder of the circuitry does not have the P region so its reliability is not compromised.

The new P type regions do not intersect in the center of the NMOS transistor of the EPROM. This ensures that the threshold voltage in the center of an unprogrammed EPROM remains at a low value of less than 2.0 volts. The existence of the P region along the edges of the device will increase the threshold voltage in these regions.

An enhancement to this design provides a better NMOS layout would have the N<sup>++</sup> regions removed along the edges of the transistor, but present in the center of the device. This would ensure an intersection of the new P type region with N<sup>+</sup> and the associated high electric field region.



## **BRIEF DESCRIPTION OF THE FIGURES**

Figure 1 is a schematic diagram of an EPROM cell (101) according to the invention.

Figure 2 illustrates a prior art device (100) showing a top view of a lightly doped drain NMOS transistor which is a portion of an EPROM structure;

Figure 3 illustrates a cross section of the prior art device (100) of Figure 1; as seen from section lines III-III of Figure 2;

Figure 4 illustrates a top down view of an NMOS transistor (101) according to the invention;

Figure 5 illustrates a cross section of the NMOS transistor (101) of Figure 4; as seen from section lines V-V of Figure 4;

Figure 6 is a top view of an alternative embodiment of the invention (110).

Figures 7, 8 and 9 illustrate cross sectional views VII, VIII, and IX respectively of Figure 6.

Figures 10a – 10i illustrate the steps used to fabricate an improved EPROM semiconductor structure by the addition of a P type region that augments the P well doping under the NMOS device gate.

## **DETAILED DESCRIPTION OF THE EMBODIMENTS**

Referring to Figure 1, there is shown a schematic of an EPROM cell 101 according to the invention. The EPROM cell 101 includes a NMOS transistor 102 integrated with capacitor 104. A control gate 105 is connected directly to one of the plates of a capacitor 104. A floating gate 103 is located between the control gate 105 and the source and drain of transistor 102.

Figures 2 and 3 are a top view and a sectional view as seen from lines III-III of a prior art CMOS and BICMOS device structures 100 manufactured on a silicon substrate. The CMOS and BICMOS device structures 100 includes a poly gate 1, a drain 2, and a source 3. The drain 2 and source 3 each include a  $N^+$  region 4 and 14 on the surface of a P well 6. Oxide spacers 7 and 17 are located between the source 3 and drain 2 and around the poly gate 1. Dopant grading is provided between the P well 6 and the  $N^+$  region 4 and 14 of the source 3 and drain 2 by lightly doped drains (NLdd) 5 and 15.

This grading is necessary for reliability purposes. Without the grading, the drain to body electric field is sufficiently large to generate an abundance of hot electrons. Hot electrons eventually lead to threshold voltage shifts, drive current degradation, sub-threshold voltage degradation and transconductance degradation. Any or all of these parametric shifts may be sufficient to lead to circuit failures over the life of the circuit. Hence reliability is compromised.

An EPROM cell requires hot electron generation for programming but the process technology may utilize lightly doped drains and spacers to minimize hot electron generation. The result is an NMOS transistor 100 cell which cannot be programmed or

which requires an inordinate amount of time to program. Complex circuits require a large number of EPROMS and thus a long programming time of 200 ms per EPROM could add a couple of seconds or more to the test time and thus increase the expense considering the millions of circuits which require testing.

Referring to Figure 4, there is illustrated a top down view of an NMOS transistor 101 suitable for use as an EPROM cell according to the invention. The NMOS transistor 101 includes a drain 2 and a source 3 of a  $N^+$  regions 4 and 14. Additionally, there is a poly gate 1 with a P well 6 located beneath the poly gate 1 and the  $N^+$  regions 4 and 14. Lightly doped drain (NLDD) regions 5 and 15 are located beneath the  $N^+$  regions 4 and 14 and extends into the channel region under the poly gate 1. Oxide spacers 7 and 17 are located on the top surface of the substrate adjacent to the poly gate 1 and is used during the implanting of the  $N^+$  region 4 and 14 as a mask for the drain 2 and source 3. Novel P regions 8 and 18 are located beneath the poly gate 1 and separated from the  $N^+$  regions 4 and 14 by the NLDD regions 5 and 15, respectively. The P regions 8 and 18 extend into the P well 6 from the outer periphery 51 but are not present in the center 50 of the NMOS transistor 101. In a pure CMOS process flow, the new P regions 8 and 18 and the P well 6 are positioned prior to the poly gate 1 formation.

The P regions 8 and 18 may or may not be completely counter doped to the NLDD region 5 and 15 and may or may not actually intersect with the  $N^+$  regions 4 and 14. The purpose of the P regions 8 and 18 are to increase the electric field between the  $N^+$  region 4 and P well 6. This increase in the electric field will increase the hot electron generation

rate in programming an EPROM cell and thus will enable the NMOS transistor 101 to be programmed quicker and possibly at a lower voltage than the prior art devices.

It should be noted that the  $N^+$  regions 4 and 14 are completely contained within Nldd regions 5 and 15.

In Figure 5 there is illustrated a sectional view of the NMOS transistor 101 as seen from section lines V-V of Figure 4 and suitable for use as an EPROM cell according to the invention. This embodiment solves the above described disadvantage of the prior art devices. The NMOS transistor 101 cell includes the body P well 6, on which there is the poly gate 1, drain 2, and source 3. The oxide spacers 7 and 17 are on the sides of the poly gate 1 which is over the channel that is bounded by the  $N^+$  regions 4 on one side and 14 on the other side. Located beneath the  $N^+$  regions 4 and 14 are the Nldd regions 5 and 15 with Nldd region 5 being completely under the  $N^+$  region 4 and Nldd region 15 being completely under the  $N^+$  region 14. Both  $N^+$  regions 4 and 14 are not connected to the poly gate 1 in the channel region and are connected to a LOCOS region 49 that establishes the outer periphery 51. The additional P regions 8 and 18 are present in the channel region beneath the poly gate 1 and connected to the Nldd regions 5 and 15. Not shown is a thin oxide layer that separates the poly gate 1 from the channel and the Nldd regions 5 and 15.

Here again Figure 5 illustrates the sectional view of the device of Figure 4 as seen from the section lines V-V of Figure 5. Because regions 8 and 18 are only located at the edges of the structure, a view through section lines VI-VI through the device center would appear identical to Figure 3.

Referring to Figure 6, there is shown a top view of NMOS transistor 110 which is an alternate embodiment of the invention and is suitable for use as an EPROM cell. As in the embodiment of Figures 4, this embodiment includes drain 2 source 3 and poly gate 1. However, the Nldd regions 5 and 15 are removed from along the edges of the NMOS transistor 101 except in the center of the device. This arrangement insures the intersection of the P regions 8 and 18 with the N<sup>+</sup> regions 4 and 14 because of the associated high electric field, it is important that the P regions 8 and 18 intersect with the N<sup>+</sup> drain regions 4 and 14. However, using this alternate approach enables the P regions 8 and 18 to only be included as a design choice. In the embodiment of Figure 6, the N<sup>+</sup> regions 4 and 14 are not completely contained within Nldd regions 5 and 15. Each of the Nldd regions 5 and 15 extend from the left and right edges of the active area towards the center of the poly gate1.

Figure 7 is a sectional view of the device 110 as seen from the sectional lines VII-VII of Figure 6. This sectional view shows the P regions 8 or 18 as hidden lines and thus resembles the prior art device shown in Figure 2.

Figure 8 is a sectional view of the device 110 as seen from section lines VIII-VIII of Figure 6. As can be seen from the figure, the Nldd regions 5 and 15 are not presented at this position on the cell 110.

Figure 9 is a sectional view of the EPROM cell 110 as seen from the sectional lines IX-IX of Figure 6. As seen from the figures, the P region 8 is visible but the Nldd regions 5 and 15 are not presented at the section position.

Figures 10a-10i provides an abbreviated process flow diagram sufficient to enable one skilled in the art to practice the invention without undue experimentation.

Additionally, Table 1 provides a more detailed description of the process flow necessary to fabricate the invention.

Beginning with Figure 10a, the process for the disclosed embodiments starts with an N type tub 43 that is pattern by a first reticle being implanted into the P type substrate 44. A thin oxide layer 41 is then created at least on top of the N type tub 43. The N tub 43 is not necessary with an N<sup>+</sup> wafer and an N<sup>-</sup> epitaxial layer.

In Figure 10b, the growth of an epitaxial silicon layer 45 can be performed by the growing of the N type epitaxial silicon layer 45.

In Figure 10c, following the growth of the epitaxial layer 45, an active area 52 is masked and an LOCOS operation is performed leaving a LOCOS oxide layer 49 around the mask that establishes an active area 52 having the outer periphery 51.

In Figure 10d, after preparation of the active area 52 using techniques known to those skilled in the art and using a second reticle, a P well 6 having a junction depth of approximately 1 micron, is implanted into the N type epitaxial layer 45 with a peak doping of approximately  $3.0 \times 10^{17}/\text{cm}^3$ . P base regions 8 and 18, novel to the invention, are then implanted into the P well 6 using a third reticle at a junction depth approximately 0.60 microns and a peak doping of approximately  $1.0 \times 10^{18}/\text{cm}^3$ . The term "P base" is used to denote the step in which on different parts of the semiconductor chip of the disclosed embodiment, the P base of an NPN transistor is simultaneously being

fabricated. If no such P base operation exists in the process, extra dedicated operations could be added to the flow process to create regions 8 and 18.

In Figure 10e, the results of the steps used to create the poly gate 1 is disclosed. The steps include growing the gate oxide 53, depositing a layer of polysilicon. After which there is an N<sup>+</sup> doping performed unpatterned polysilicons. The layer of polysilicon is masked and etched to create the poly gate 1. Then, using the pattern left by the second reticle and the poly gate 1 to define the Nldd regions 5 and 15 there is performed an Nldd implant at a junction depth of approximately 0.25 microns and a peak doping of approximately  $3.0 \times 10^{18}/\text{cm}^3$  as shown is Figure 10f.

In Figure 10g, the oxide is deposited and etched to form the oxide spaces 7 and 17.

In Figure 10h, using the pattern left by the second reticle and the oxide spacers and the same reticle used for the Nldd implants, N<sup>+</sup> regions 4 and 14 are implanted at a junction depth of approximately 0.2 microns and a peak doping of approximately  $1.5 \times 10^{20}/\text{cm}^3$  between the LOCOS area and the oxide spaces 7 and 17.

Finally, in Figure 10i, the circuit is completed according to common practices in the art including adding passivation layer 62, metal connection, etc.

**TABLE 1**

Step	Parameters
P Substrate	
Initial Oxidation	5300A
N Tub PR/Etch/Implant	(optional)
N Tub Drive	
Oxide Strip	
Epi	3.1-3.6 um
Pad Oxidation	250A
Nitride Deposition	1550A
Nitride PR/Etch	
Isolation Oxidation	6000A
Nitride Strip/Pad Oxide Strip	
Sacrificial Oxidation	300A
P Well PR/Implant	B <sub>11</sub> , 4.0x10 <sup>12</sup> /cm <sup>2</sup> , 30 KeV & B <sub>11</sub> , 1.2x10 <sup>13</sup> /cm <sup>2</sup> , 284 KeV
P Base PR/Implant	B <sub>11</sub> , 3.0x10 <sup>13</sup> /cm <sup>2</sup> , 50 KeV
Sacrificial Oxidation Strip	9:1 BHF 45 secs
Gate Oxidation	140A
Poly Deposition/Dope	
Poly PR/Etch	
Poly Oxidation	50A
N Ldd PR/Implant	P <sub>31</sub> , 4.0x 10 <sup>13</sup> /cm <sup>2</sup> , 80 KeV
Oxide Spacer Deposition	2000A
Oxide Spacer Etch	
Screen Deposition	225A
N <sup>+</sup> PR/Implant	As <sub>75</sub> , 2.0x10 <sup>15</sup> /cm <sup>2</sup> , 120 KeV
S/D RTA	
Screen Etch	



Platinum Sputter/Sinter/Strip

Field Dep/Planarization

Contacts PR/Etch

Triple Level Metal

TOP SECRET

## CLAIMS

I claim:

1. A process for making a semiconductor device comprising the steps of:

performing a LOCOS operation on an epitaxial layer of a semiconductor substrate to define an active region having a predefined boundary;

implanting a first dopant into the epitaxial layer within the active region to create a well of a first type of conductivity;

implanting the first dopant into the well to create at least a first region;

depositing a polysilicon layer over the active region;

doping the polysilicon layer to create a poly semiconductor layer of a second type of conductivity;

patterning the poly semiconductor layer to create a poly gate over the first region and well;

performing an ion implant of the second type conductivity between the LOCOS regions and the poly gate to create first and second lightly doped regions, the first and second lightly doped regions being separated by a channel region beneath the poly gate;

depositing an oxide layer over the poly gate and active region;

etching the oxide layer to create side spacers on each side of the poly gate; and

implanting a heavy dose of the second type of dopant between the LOCOS regions and the side spacers to create source and drain regions, the source and drain regions being separated by the channel region.

2. The process according to claim 1, further including the step of:

implanting the second type of dopant into the semiconductor substrate prior to the step of growing the epitaxial layer.

3. The process according to claim 2, wherein the first type of dopant is a P type dopant and the second type of dopant is an N type of dopant.

4. The process according to claim 1, further wherein the step of implanting the first type of dopant into the well to create at least a first region further comprises the step of :

creating a second region separated from the first region.

5. The process according to claim 4, wherein the active region has a center and the step of creating the first and second regions includes the step of:

implanting the first and second regions across the boundary of the active region and directly spaced apart from each other across the active region and spaced apart from the center of the active region.

6. The process according to claim 5, wherein the first type of dopant is a P type of dopant and the step of performing an implant of the second type of dopant between the LOCOS regions and the poly gate comprises the step of:

implanting a light dose of N type dopant with each of the first and second lightly doped regions and positioned to be in contact with the first and second regions.

7. The process according to claim 4, wherein the step of:

patterning the poly semiconductor layer to create a poly gate includes the step of:

patterning the poly gate over the first and second regions.

8. The process according to claim 5, wherein the first type of dopant is a P type of dopant and the step of:

performing an implant of the second type of dopant between the LOCOS regions and the poly gate comprises the step of:

implanting a light dose of N type dopant with each of the first and second lightly doped regions being positioned not to be in contact with the first and second regions.

9. The process according to claim 1, wherein the step of:

performing an ion implant of the second type conductivity between the LOCOS regions and the poly gate comprises the step of:

implanting a light dose of N type dopant.

10. The process according to claim 9, wherein the step of implanting a heavy dose of a second type of dopant comprises the step of:

implanting the heavy dose of N type dopant into the first and second lightly doped regions.

11. The process according to claim 1, wherein the step of:

implanting a heavy dose of the second type of dopant between the LOCOS regions and the side spacers to create source and drain regions, the source and drain regions being separated by the channel region; all included the step of:

patterning the active area using a first reticle to create a pattern on the active region.

12. The process according to claim 11, wherein the step of:

performing an ion implant of the second type conductivity between the LOCOS regions and the poly gate to create first and second lightly doped regions, the first and second lightly doped regions being separated by a channel region beneath the poly gate included the step of:

patterning the active area using the first reticle to create a pattern on the active region.

13. A process for making a semiconductor device comprising the steps of:

performing a LOCOS operation on an epitaxial layer to define an active region;

using a first reticle to create a pattern for implanting a first dopant into the epitaxial layer within the active region to create a well of a first type of conductivity;

using a second reticle to create a pattern for implanting with the first type of dopant into the well to create first and second regions;

depositing a polysilicon layer over the active region;

heavily doping with a second dopant the polysilicon layer to create a poly semiconductor layer of a second type of conductivity;

patterning the poly semiconductor layer to create a poly gate;

using a third reticle to create a pattern for lightly doping with a second dopant the active region between the LOCOS regions and the poly gate;

depositing an oxide layer over the poly gate and active region;

etching the oxide layer to create side spacers on each side of the poly gate; and

using the third reticle to create a pattern for heavily doping with the second dopant the active region between the LOCOS regions and the side spacers.

14. The process according to claim 13, further including the step of:

implanting the second type of dopant into substrate prior to the step of growing the epitaxial layer.

15. The process according to claim 14, wherein the first type of dopant is a P type dopant and the second type of dopant is an N type of dopant.

16. The process according to claim 13, wherein the active region has a predefined boundary and a center and the step of:

implanting with the first type of dopant into the well to create first and second regions includes the step of:

implanting the first and second regions across the boundary of the active region and spaced apart directly across the active region from each other and spaced apart from the center of the active region.

17. The process according to claim 16, wherein the first type of dopant is a P type of dopant and the step of lightly doping the second type of dopant between the LOCOS regions and the poly gate comprises the step of:

implanting a light dose of N type dopant wherein each of the first and second lightly doped regions are in contact with the first and second regions.

18. The process according to claim 17, wherein the step of heavily doping with the second dopant comprises the step of:

implanting the heavy dose of N type dopant into the first and second lightly doped regions.



## ABSTRACT

An EPROM structure includes a NMOS transistor integrated with a capacitor. The terminal names of the NMOS transistor follow the conventional nomenclature: drain, source, body and gate. The gate of the NMOS transistor is connected directly and exclusively to one of the capacitor plates. In this configuration, the gate is now referred to as the “floating gate”. The remaining side of the capacitor is referred to as the “control gate”.

100224-43001




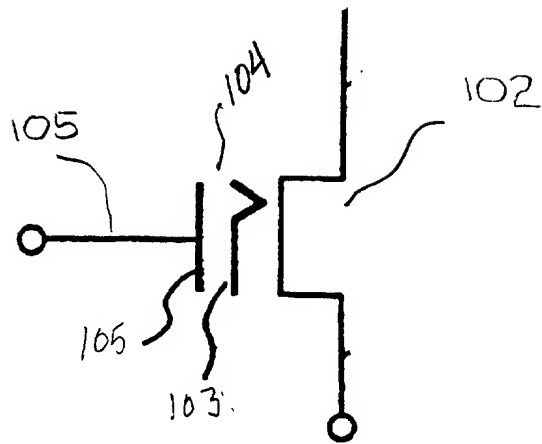


Figure 1  
101


10066294-12001

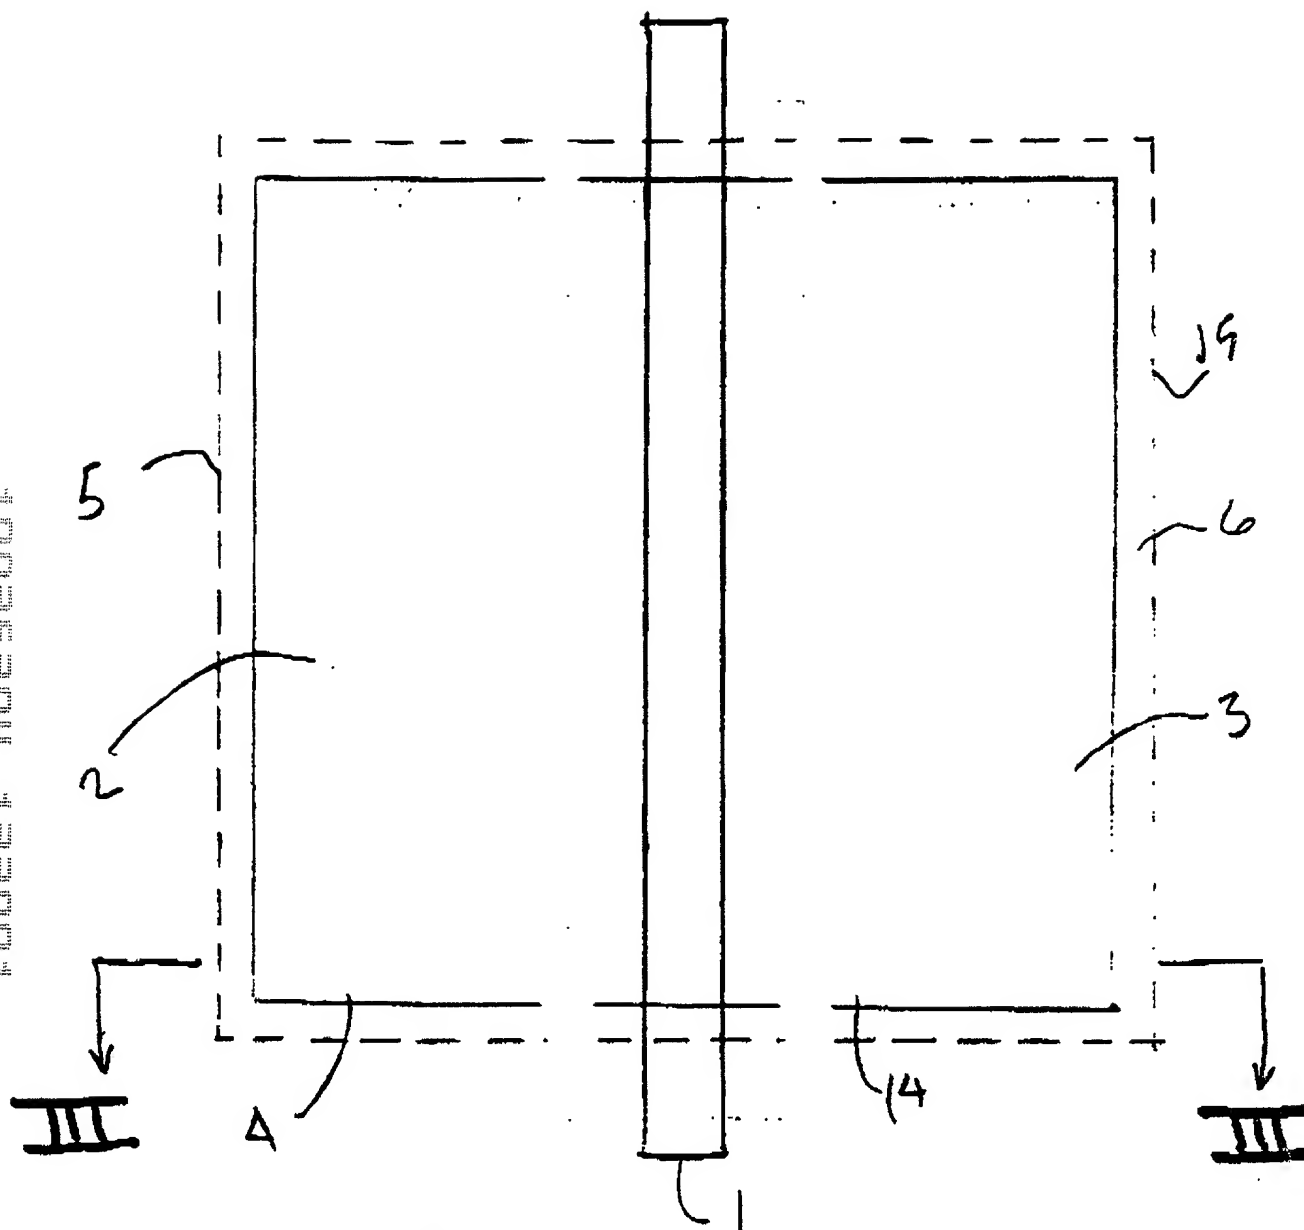

100

Prior Art

Figure 2

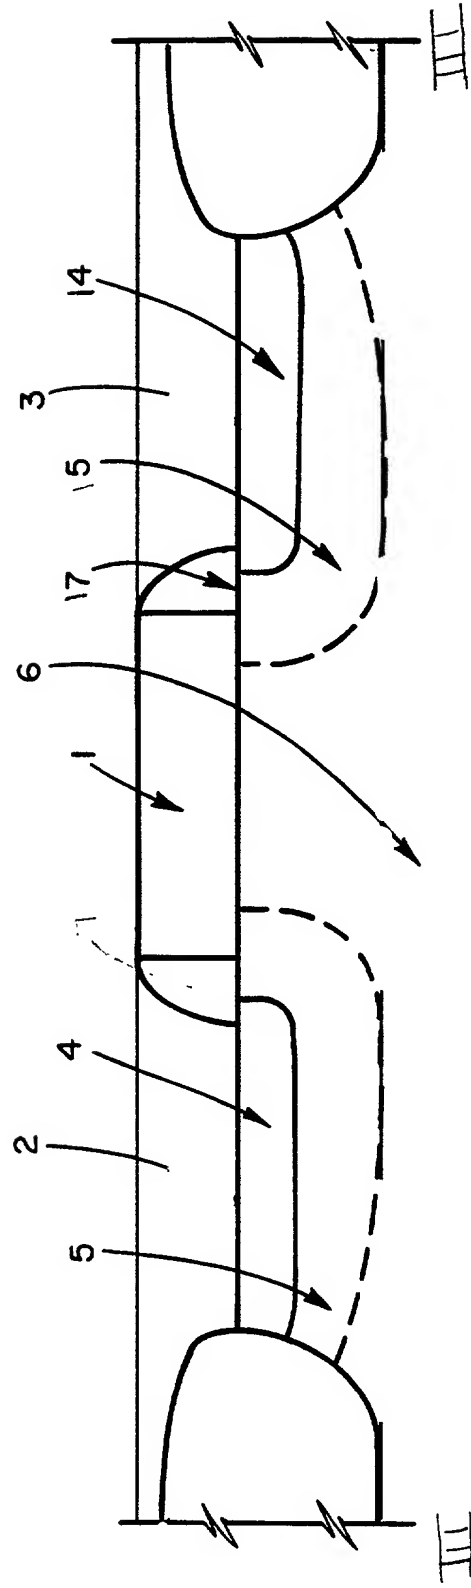

**FIG. 3**  
**PRIOR ART**

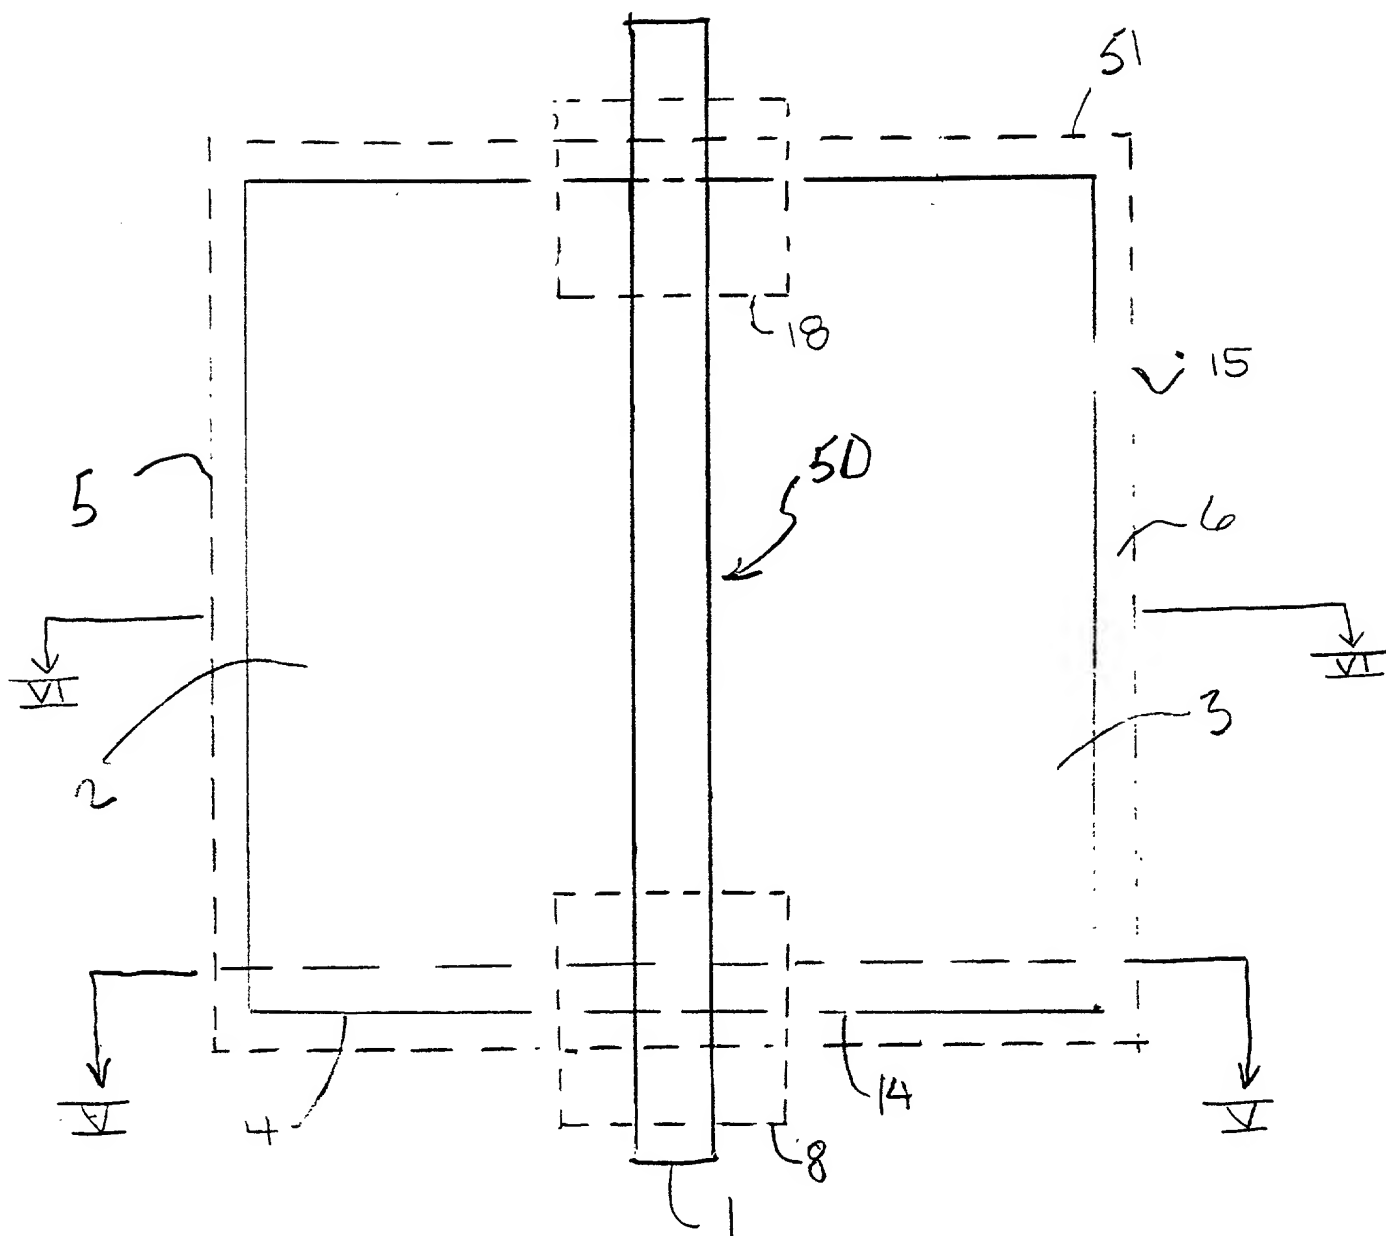


Figure 4



10066394.12001

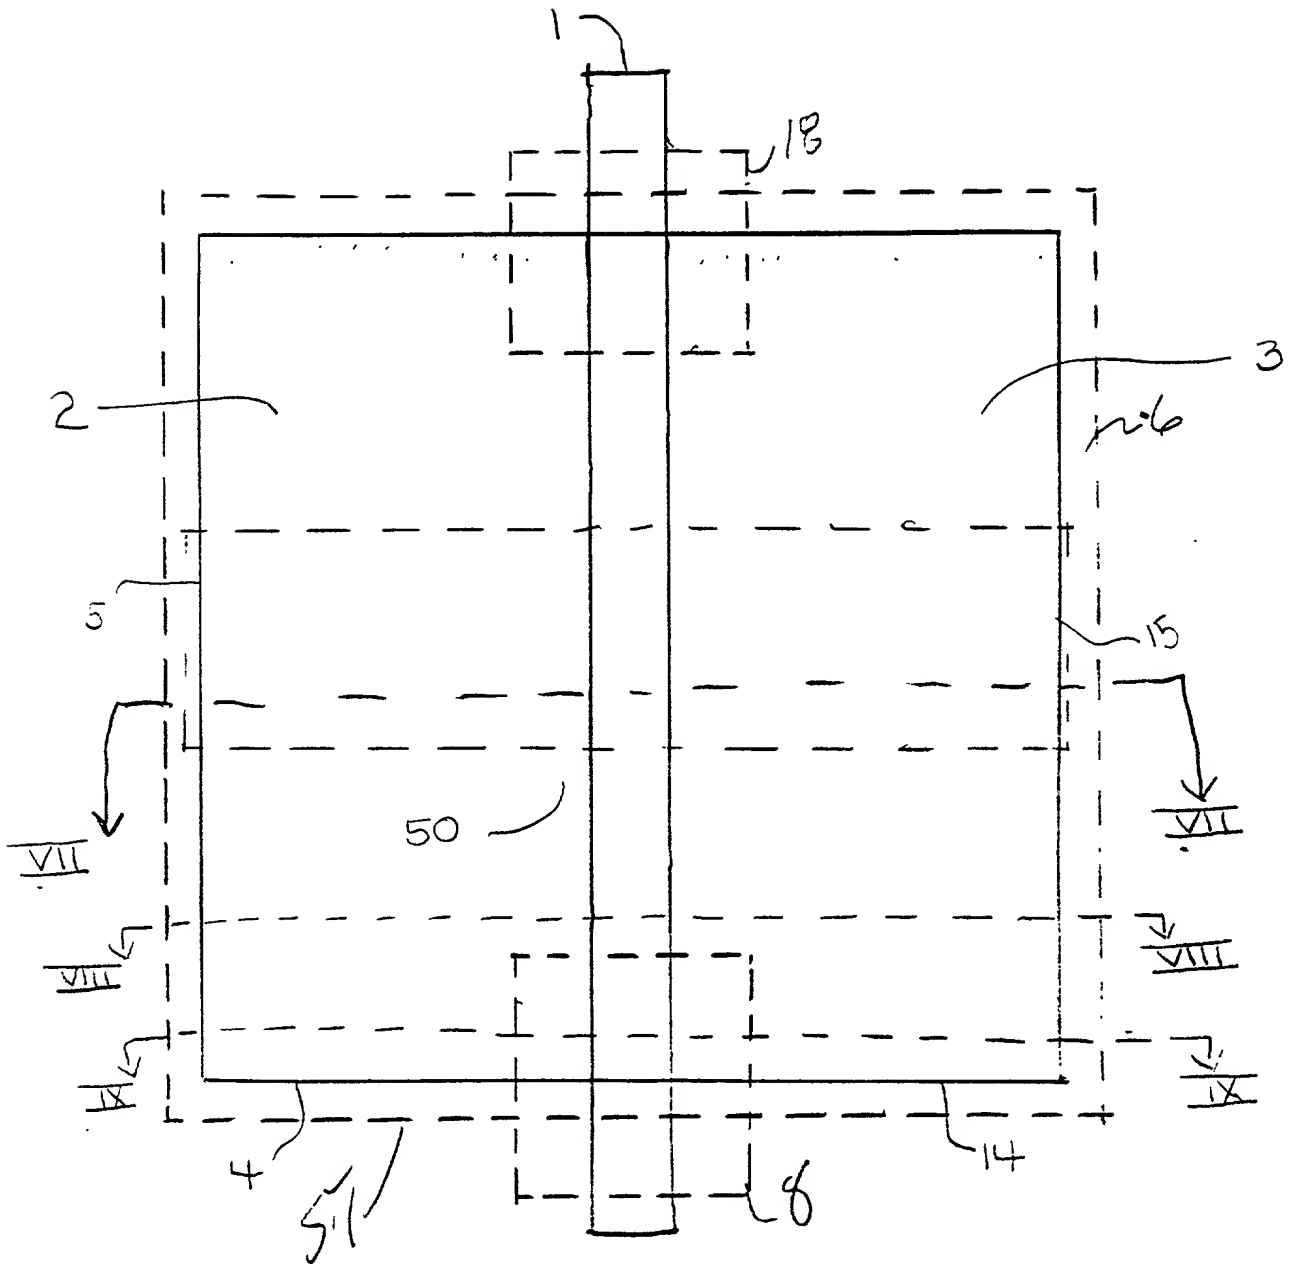


Figure 6  
110

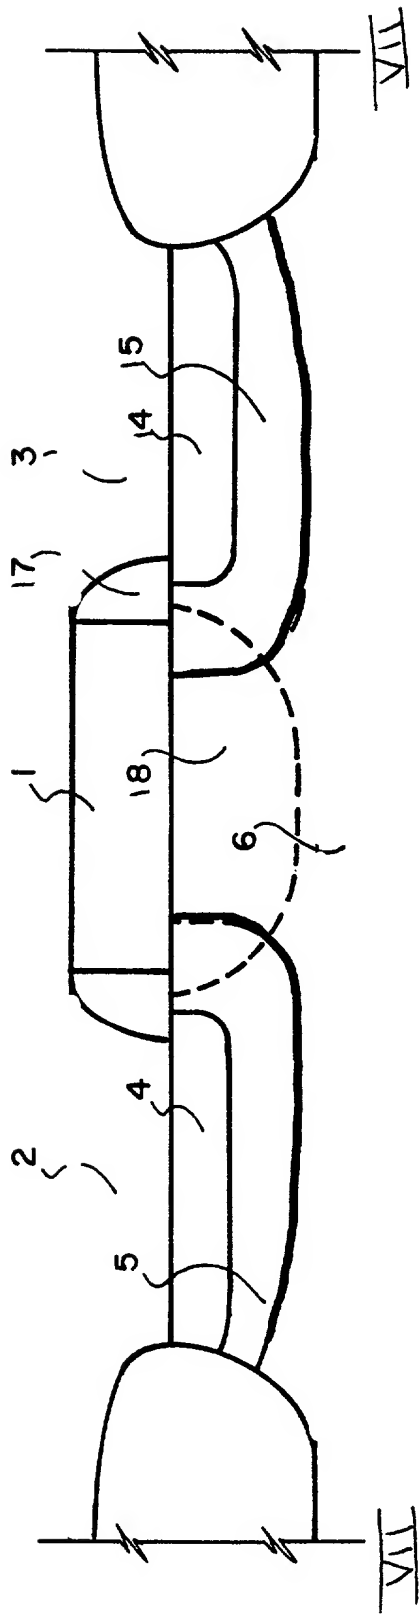


FIG. 7

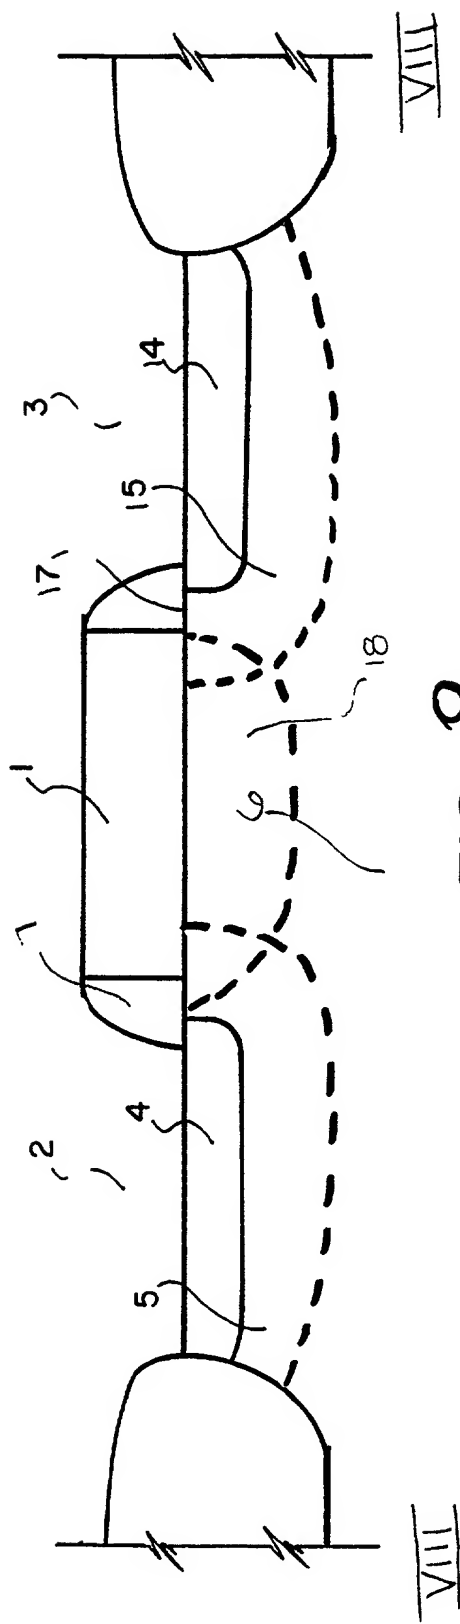


FIG. 8



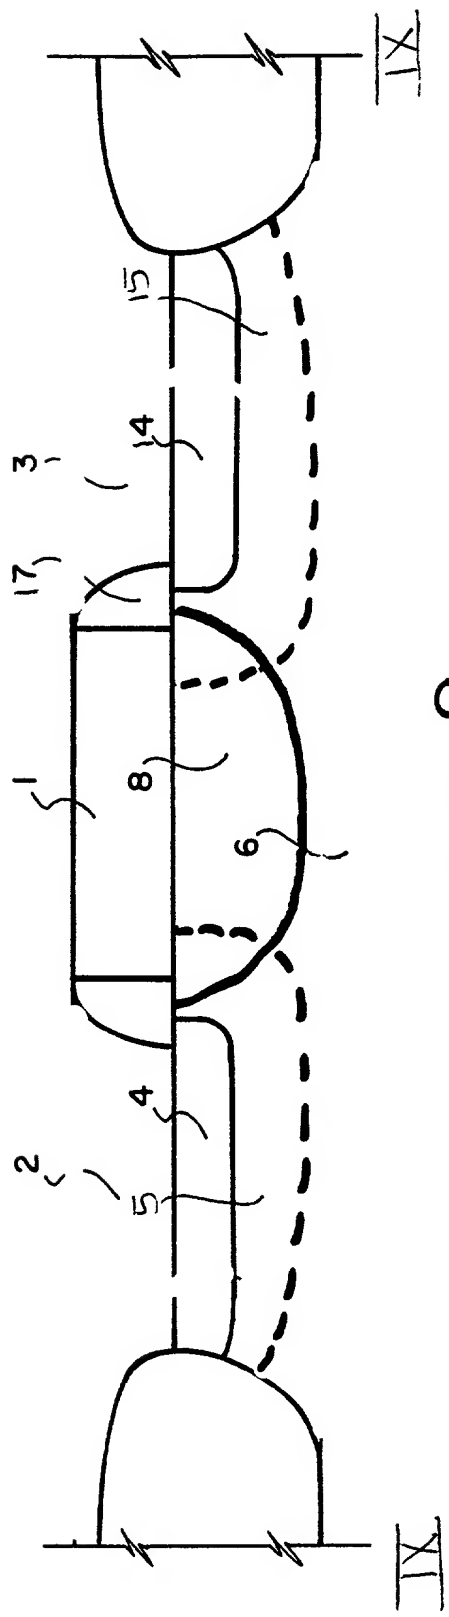


FIG. 9

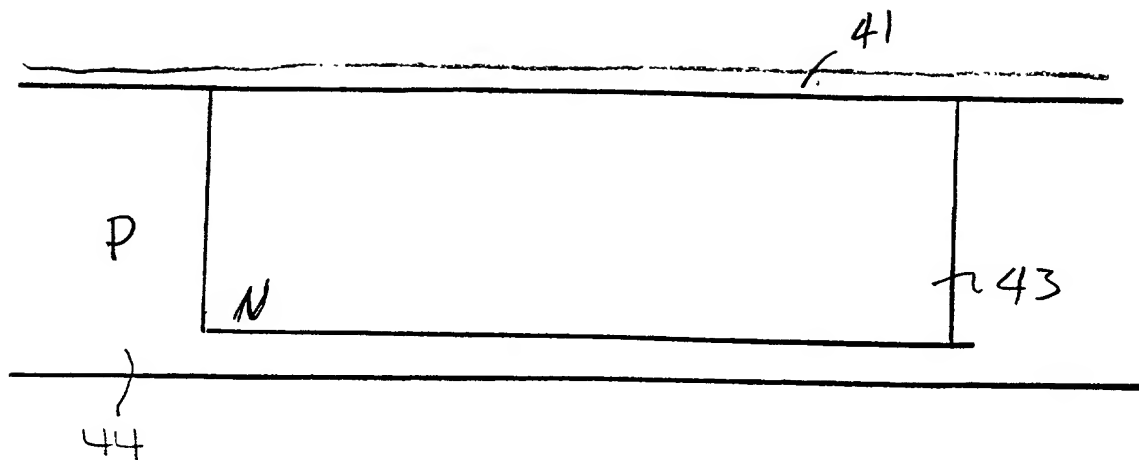


Figure 10a

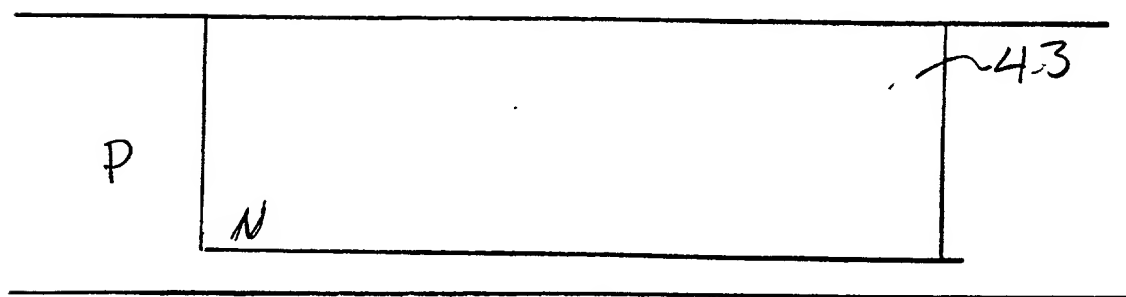


Figure 10b

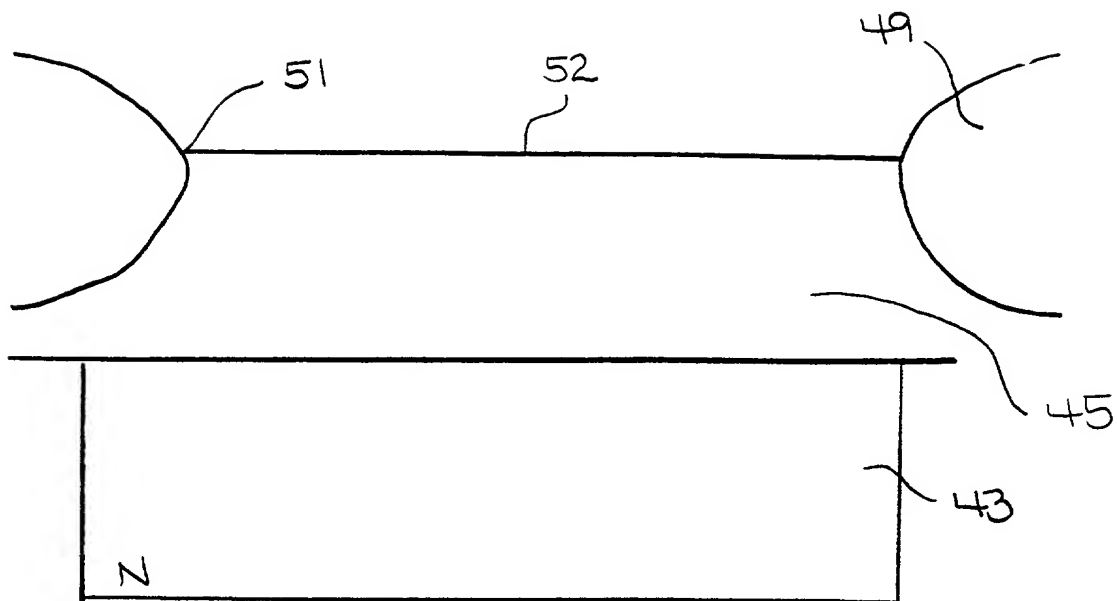


Figure 10c

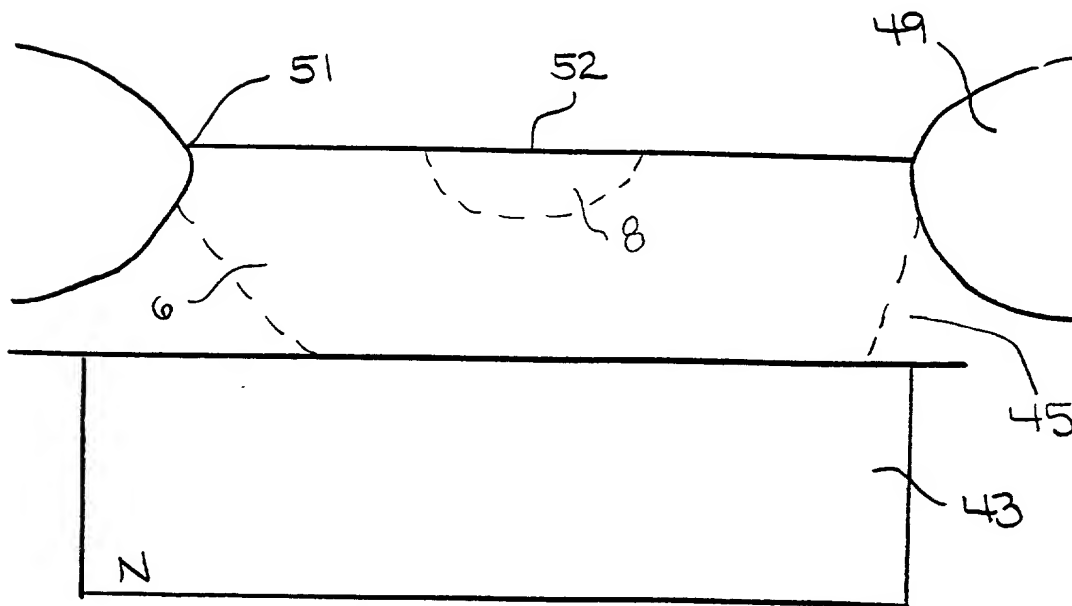


Figure 10d

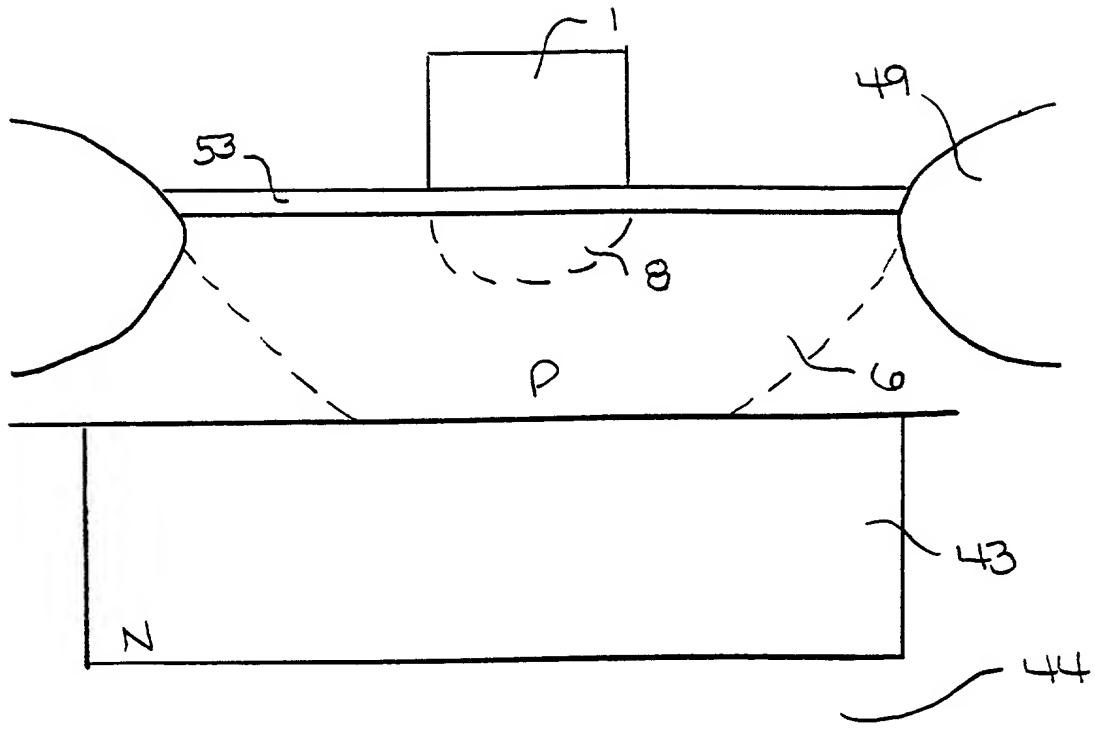


Figure 10e

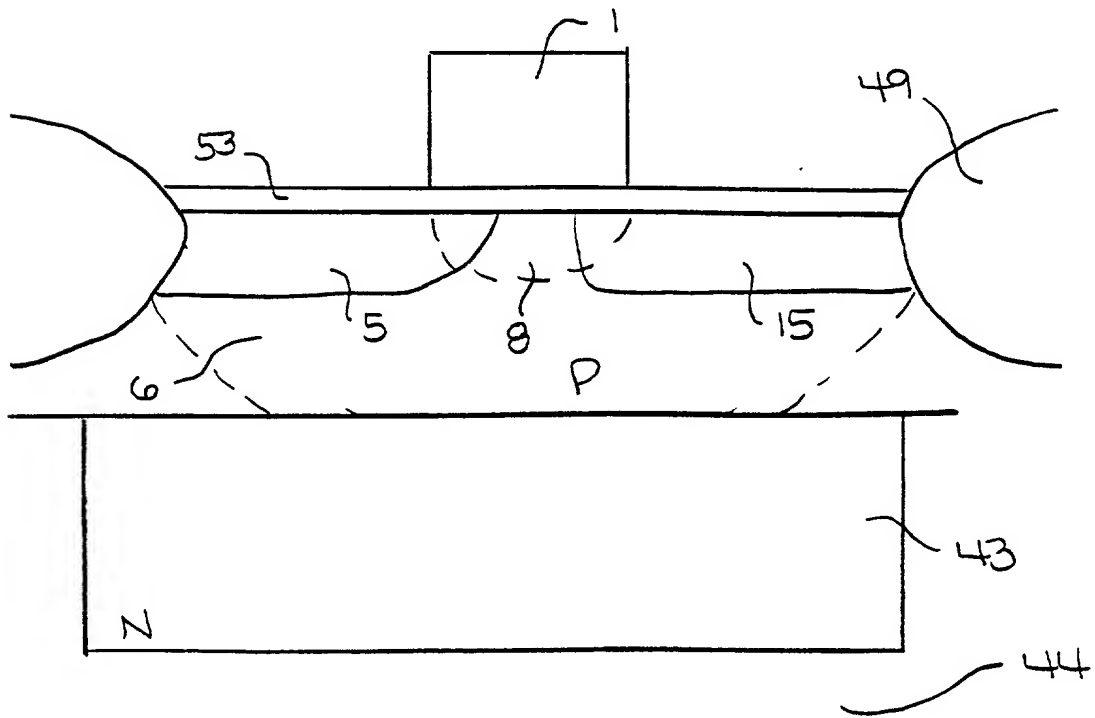


Figure 10f

Figure 10h

Variable	Mean	SD	Min	Max
Age	34.5	10.2	18	65
Gender	1.2	0.4	1	2
Marital status	1.5	0.5	1	3
Education	12.5	1.5	9	16
Income	1.5	0.5	1	3
Occupation	1.5	0.5	1	3
Religion	1.5	0.5	1	3
Health status	1.5	0.5	1	3
Smoking status	1.5	0.5	1	3
Alcohol consumption	1.5	0.5	1	3
Exercise frequency	1.5	0.5	1	3
Stress level	1.5	0.5	1	3
Sleep quality	1.5	0.5	1	3
Appetite	1.5	0.5	1	3
Weight change	1.5	0.5	1	3
Blood pressure	1.5	0.5	1	3
Blood sugar	1.5	0.5	1	3
Cholesterol	1.5	0.5	1	3
Triglycerides	1.5	0.5	1	3
Hemoglobin A1c	1.5	0.5	1	3
Hemoglobin	1.5	0.5	1	3
White blood cells	1.5	0.5	1	3
Platelets	1.5	0.5	1	3
Red blood cells	1.5	0.5	1	3
Mean corpuscular volume	1.5	0.5	1	3
Mean corpuscular hemoglobin	1.5	0.5	1	3
Mean corpuscular hemoglobin concentration	1.5	0.5	1	3
Red blood cell distribution width	1.5	0.5	1	3
Reticulocyte count	1.5	0.5	1	3
Prothrombin time	1.5	0.5	1	3
Partial thromboplastin time	1.5	0.5	1	3
Fibrinogen	1.5	0.5	1	3
D-dimer	1.5	0.5	1	3
C-reactive protein	1.5	0.5	1	3
Interleukin-6	1.5	0.5	1	3
Tumor necrosis factor- $\alpha$	1.5	0.5	1	3
Interleukin-10	1.5	0.5	1	3
Interleukin-1	1.5	0.5	1	3
Interleukin-2	1.5	0.5	1	3
Interleukin-4	1.5	0.5	1	3
Interleukin-5	1.5	0.5	1	3
Interleukin-7	1.5	0.5	1	3
Interleukin-8	1.5	0.5	1	3
Interleukin-9	1.5	0.5	1	3
Interleukin-11	1.5	0.5	1	3
Interleukin-12	1.5	0.5	1	3
Interleukin-13	1.5	0.5	1	3
Interleukin-14	1.5	0.5	1	3
Interleukin-15	1.5	0.5	1	3
Interleukin-16	1.5	0.5	1	3
Interleukin-17	1.5	0.5	1	3
Interleukin-18	1.5	0.5	1	3
Interleukin-19	1.5	0.5	1	3
Interleukin-20	1.5	0.5	1	3
Interleukin-21	1.5	0.5	1	3
Interleukin-22	1.5	0.5	1	3
Interleukin-23	1.5	0.5	1	3
Interleukin-24	1.5	0.5	1	3
Interleukin-25	1.5	0.5	1	3
Interleukin-26	1.5	0.5	1	3
Interleukin-27	1.5	0.5	1	3
Interleukin-28	1.5	0.5	1	3
Interleukin-29	1.5	0.5	1	3
Interleukin-30	1.5	0.5	1	3
Interleukin-31	1.5	0.5	1	3
Interleukin-32	1.5	0.5	1	3
Interleukin-33	1.5	0.5	1	3
Interleukin-34	1.5	0.5	1	3
Interleukin-35	1.5	0.5	1	3
Interleukin-36	1.5	0.5	1	3
Interleukin-37	1.5	0.5	1	3
Interleukin-38	1.5	0.5	1	3
Interleukin-39	1.5	0.5	1	3
Interleukin-40	1.5	0.5	1	3
Interleukin-41	1.5	0.5	1	3
Interleukin-42	1.5	0.5	1	3
Interleukin-43	1.5	0.5	1	3
Interleukin-44	1.5	0.5	1	3
Interleukin-45	1.5	0.5	1	3
Interleukin-46	1.5	0.5	1	3
Interleukin-47				

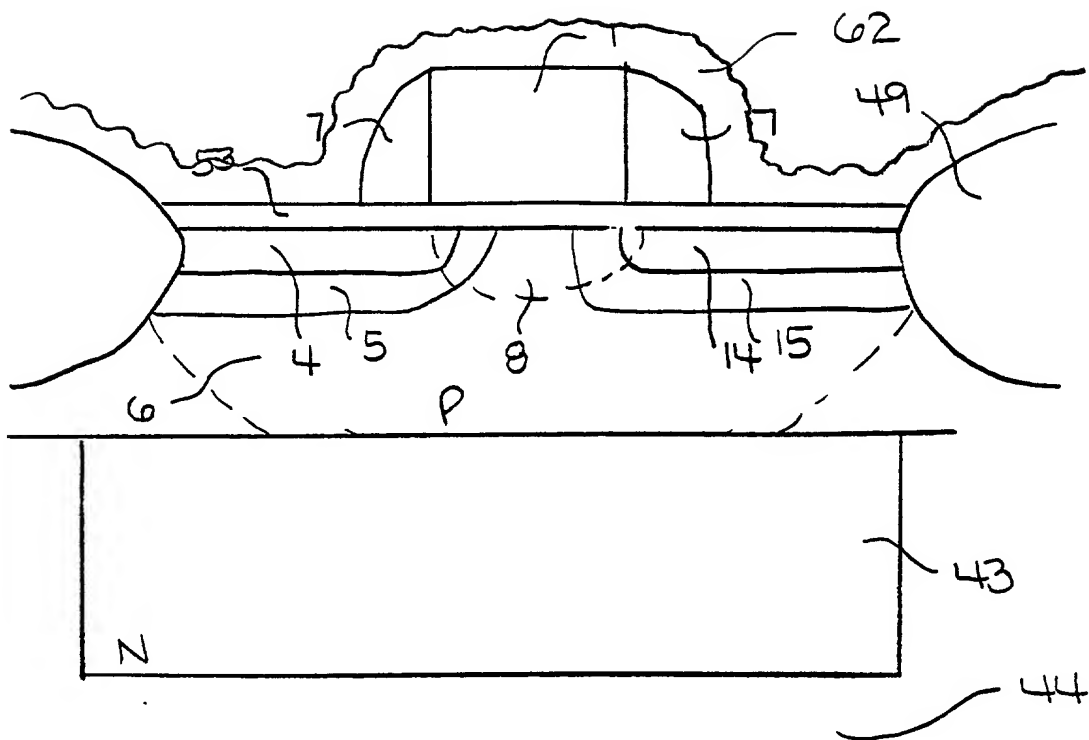


Figure 10i

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

**Attorney Docket: INT-0001A**

In re patent application of )  
Michael D. Church )  
Serial No. Unknown ) **Group Art Unit: Unknown**  
Filed: Filed herein ) **Examiner: Unknown**

**Title: A METHOD OF FABRICATING ENHANCED EPROM STRUCTURES  
WITH ACCENTUATED HOT ELECTRON GENERATION REGIONS**

**DECLARATION AND POWER OF ATTORNEY**

I, Michael D. Church, the below named inventor, hereby declare that:

My residence, post office address and citizenship are as stated below next to my  
name.

I verily believe I am the original, first and sole inventor of the subject matter which  
is claimed and for which a patent is sought on the design invention entitled:

**"A Method of Fabricating Enhanced EPROM Structures with  
Accentuated Hot Electron Generation Regions"**

which is described and claimed in the attached specification.

I hereby state that I have reviewed and understand the contents of the above  
identified specification, including the claims, as amended by any amendment referred to  
in this declaration.

I acknowledge the duty to disclose to the U.S. Patent Office all information known  
to me that is material to the patentability of any claim in accordance with Title 37, Code  
of Federal Regulations, §1.56, and which is material to the examination of this applica-

tion, namely, information where there is a substantial likelihood that a reasonable examiner would consider it important in deciding whether to allow the application to issue as a patent.

I do not know and do not believe that the design was ever known or used in the United States of America before my invention thereof.

I do not know and do not believe that the design was ever patented or described in any printed publication in any country before my invention thereof for more than one year prior to this application.

I do not know and do not believe that the design was in public use or on sale in the United States of America more than one year prior to this application.

The design has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than six months prior to this application.

I hereby claim foreign priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Foreign Application(s), if any,

Filed Prior to This Application:



Country

Application No.

(day, month, year)

- NONE -

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

- NONE -

**POWER OF ATTORNEY**

I hereby appoint **Richard K. Robinson (Reg. No. 28,109)** and Harry C. Post, III (Reg. No. 26,019) as my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith. Send all correspondence to:

Richard K. Robinson  
North Dallas Bank Tower, Suite 575  
12900 Preston Road, LB-41  
Dallas, Texas 75230

Direct all telephone calls to Richard K. Robinson at (972) 866-7786.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of this application or any patent issued thereon.

Full name of inventor: Michael David Church

Residence: 355 Citrus Avenue, Sebastian, Florida 32958

Citizenship: United States

Post Office Address:

Date:

Dec 13, 2001

  
Michael D. Church